

10/519 087

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
**WO 2004/007850 A1**

(51) International Patent Classification<sup>7</sup>: **E02D 29/14**

Rue de Xon, 54700 Lesmenils (FR). PICKAVANCE,  
John, Neil [GB/GB]; 82 Saint Marys Road, Bingham,  
Nottinghamshire NG13 8DW (GB).

(21) International Application Number:  
PCT/EP2003/007478

(74) Agent: POWELL, Timothy, J.; Eric Potter Clarkson,  
Park View House, 58 The Ropewalk, Nottingham NG1  
5DD (GB).

(22) International Filing Date: 9 July 2003 (09.07.2003)

(25) Filing Language: English

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
0215943.2 10 July 2002 (10.07.2002) GB

(71) Applicant (for all designated States except US): Saint-  
Gobain PAM [FR/FR]; 91, Avenue de la Libération, 54000  
Nancy (FR).


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PENDLETON,  
Alan, Jack [GB/GB]; 7 Kirton Drive, Melton Mowbray,  
LE13 0NL (GB). ROYER, Jean-Claude [FR/FR]; 286,

[Continued on next page]

(54) Title: A FRAME FOR A RECESS IN THE GROUND AND MANHOLE ASSEMBLY

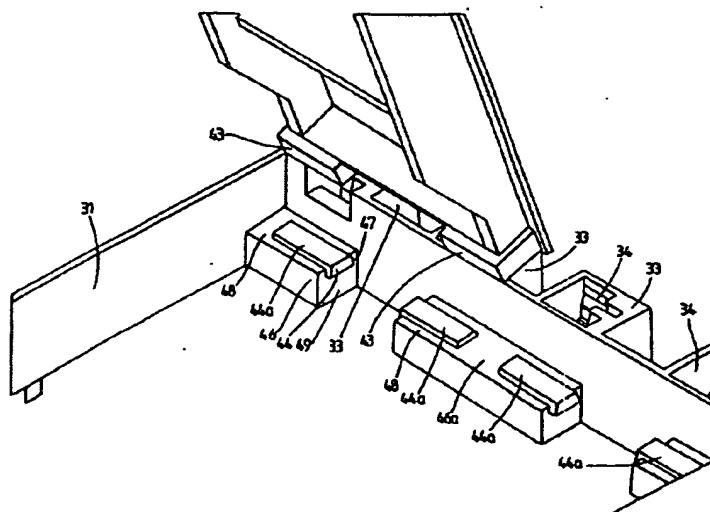

(57) Abstract: A frame (10) for bounding the open end of a recess includes an upstanding, peripheral wall (11) having protruding outwardly therefrom a flange (12). The frame (10) includes, within the peripheral wall (11) plural seatings (13, 14, 16, 17) for a cover (18) that is insertable into the frame (10). Each seating (13, 14, 16, 17) includes a seating member (21) having secured thereto a resiliently deformable pad (19) part (19a) of which protrudes beyond the seating member (21) to provide a resiliently deformable seating that is engageable by part of the cover (18).

WO 2004/007850 A1